

SPECIFICATIONS

General Information

- Pre-assembled panels and supplied brackets make for quick installation
- Compression gaskets efficiently seal and minimize air leakage
- Multiwall option adheres to 2013 NFPA 75 flame spread and smoke development requirements
- Custom sized for every job. 4' max width x 8' max height
- Designed to work with ContainAire Single and Dual doors
- Sturdy aluminum framing
- Fully supported by server cabinet and ContainAire doors if available
- Hard partitions with multiwall polycarbonate are listed in UL file SA44425

Dimensions

- 48" max width x 96" max height x 1.575" depth

OPTIONS

Panel Options

- Clear polycarbonate
 - Fully transparent
 - ASTM D-635 listed
 - 6mm thick with edge-sealing gaskets
- Multiwall polycarbonate
 - Semi-transparent
 - Flame spread index <50
 - Smoke development <450
 - ASTM E-84 and ASTM D-635 listed
 - UL 94 Listed
 - 6mm thick with edge-sealing gaskets

Aluminum Extrusion Finish Options

- Clear Anodized
- Black Anodized

INCLUDED COMPONENTS


- ContainAire® Hard Partition
- Mounting Hardware
- Foam Gasket with Adhesive Back
- Installation Guide




Hassle free installation
(Corner detail shown)



Polycarbonate
Clear/Transparent

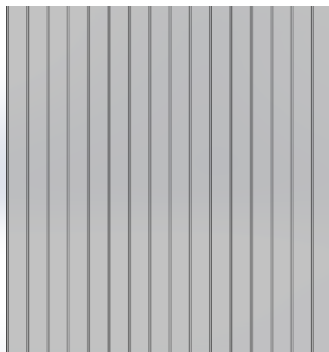

Polycarbonate
Semi-Transparent/Multiwall



Custom Extrusion Profile

Typical Hard Partition installation with aisle
end Single Door option

PART NUMBERS

