

100% variable setting of damper allows for more accurate airflow control, while allowing for nearly true 100% airflow

Side flow baffle reduces airflow when set to 0%

Free hanging design allows for easy retrofit or removal of damper

SPECIFICATIONS

General Information

- Material – Extruded Aluminum
- Adjustable from top without removing DirectAire®
- Quarter Turn Adjustment for 0-100% adjustment of damper
- Drop in fit onto Tate 60cm Steel Bolted Stringer system.

UNDERSTRUCTURE OPTIONS


- 60cm Bolted Stringer Steel System
- 120cm Bolted Stringer Steel System.

AIRFLOW PANEL COMPATIBILITY

- DirectAire® 60cm.

Opposed Blade Damper 60cm DirectAire® Panel

Static Pressure - Pa	100% Open	50% Open L/s	0% Open L/s
4.98	326	264	56
9.96	670	420	100
12.45	776	471	104
14.94	880	499	107
19.92	1044	574	120
24.90	1121	634	143
29.89	1236	693	147
34.87	1339	736	155
39.85	1403	790	172
44.83	1510	841	184
49.81	1584	880	192

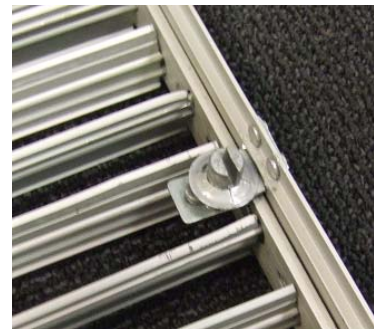

Quarter turn adjustment for precise setting of airflow



Support Tabs allow for suspension from pedestal head for panel independent mounting, optional screw down mounting.