


INSTALLATION VIEW

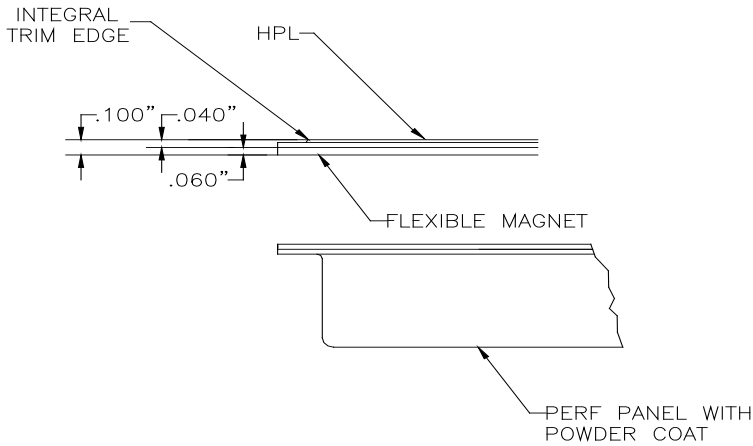

SPECIFICATIONS

General Information

- Use for temporary restriction of airflow on steel perforated panels with powder coat finish or when rolling carts or other equipment through aisles.
- Made from .040" thick Formica 70101, Greytone with integral trim edge and 1/16" flexible magnetic backing
- Cannot be used on perforated panels laminated with HPL or other laminates.
- Both 24" and 60cm versions available.
- Weight: 5.75 lbs.

PART NUMBERS

- 24": 20529
- 60cm: 20781

